
# **CONDUIT BOX**



## PACKAGE CONTENTS


Carefully remove the contents from the box, and verify that nothing was damaged in shipment.

- Conduit box
- Accessory kit
- Manual
- Template sheet

## PARTS LIST

No.	Part name	Q'ty	Description
1	Conduit Base	1	AL
2	Conduit Gasket	1	Silicon
3	PT Plug(with 0-Ring)	2	AL
4	Accessory	1	-
4-1	Screw	4	PTS1 6 x 30mm (Tapping)
4-2	Screw	4	BC M4 x 12mm
4-3	O-Ring	4	Rubber
4-4	Anchor	4	Plastic
4-5	Hole Glomat	1	Silicon

# **DIMENSION DRAWING**

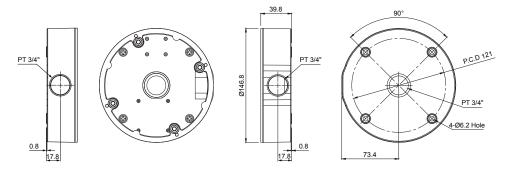


## **SPECIFICATIONS**

No.	Mechanical	Description
1	Dimension	See dimensional outline
2	Construction	Die cast and Aluminum
3	Finish	Polyester power coat
4	Weight (set+packing)	510g(420+90) / 1.123lb(0.925+0.198)

2

## **BASE INSTALLATION**

- 1. Use the base as a template on the wall or ceiling to mark the screw hole positions.
- 2. Using a 5mm bit, drill the 4 mounting holes
- 3. Push rawl plugs into holes
- Secure base plate using the screws supplied.
  (Important Use the supplied rubber o-ring on the screws on the inside of the base plate to ensure the base is waterproofed)
- 5. Make the necessary connections with in the base, and then attach the dome housing using the supplied 4mm machine screws.

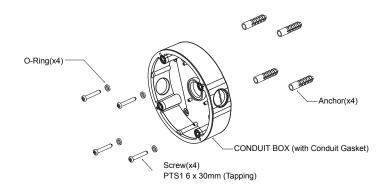

## **CAMERA INSTALLATION**

For external mounting only the conduit base with conduit gasket is used.

